

Alloy Tool Steel Allen Key

Standard: DIN911, ISO2936

Material: S2,45#,40#, if you need to use other steel, please let us know.

Heat Treatment: Quench for normal, If you have special hardness requirement, please let us know.

Surface Hardness: Above 35HRC

Finish: Plating or other.

Alloy Tool Steel Allen Key---A hex key or Allen key (also known by various other synonyms) is a tool of hexagonal cross-section used to drive bolts and screws that have a hexagonal socket in the head (internal-wrenching hexagon drive).


The Allen name is a registered trademark, originated by the Allen Manufacturing Company of Hartford, Connecticut circa 1910, and currently owned by Apex Tool Group, LLC. Its genericized use is discouraged by this company. The standard generic name used in catalogs and published books and journals is "hex key".

Shock-resisting tool steels are designated as group S steels according to the AISI classification system. These steels include S1, S2, S5, S6, and S7 types. The hardenability of group S steels can be controlled by varying their composition rather than adjusting the melting methods and grain size. They can obtain optimum hardness at higher austenitizing temperatures. The tempering resistance of group S steels can be enhanced by the addition of silicon, which also forms a microstructure to resist distortion in tempered conditions.

The typical **Alloy Tool Steel Allen Key** as below



And below is the common drawing for this kind:

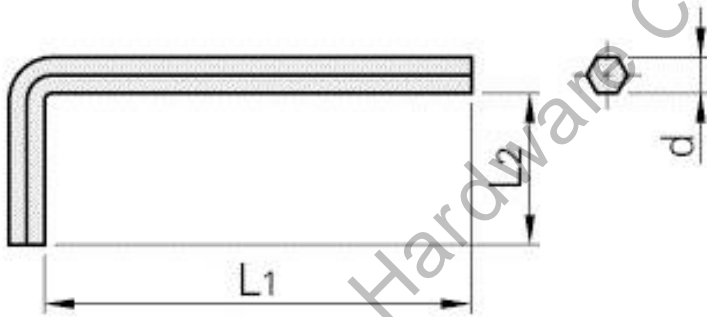

Below chart show some typical dimensions of them, you can refer it, or you can change it for your own design, if you want know more standard dimensions of them , you can contact us.

d(mm)	L1(mm)	L2(mm)
1.5	45	14
2	50	16
2.5	56	18
3	63	20
4	70	25
5	80	28
6	90	32
7	95	34
8	100	36
10	112	40